



Thermia Mega



Mega^S and Mega^M

Maximum performance and best all-round economy

Thermia Mega is a commercial heat pump designed as a beacon of best all-round economy. The result is a heat pump with an inverter-controlled compressor, a total output of up to 88 kW and the highest SPF on the market. You can connect 16 Mega^{XL} units together to achieve a total heating effect of up to 1408 kW.

Our inverter technology makes Mega an extremely flexible and versatile product, which can be installed and used in all types of property, whatever the conditions. Each solution can be tailored to meet your full heating, cooling and hot water needs.

The inverter technology, which continuously adjusts the heat pump's output to current demand, means that the heat pump can supply 100 per cent of your energy requirements. This in turn means that you will avoid having to pay for any expensive auxiliary heating. Thanks to the inverter control, you can also operate installations with different heating and hot water demands without the need for additional volume tanks. This will lower installation costs and reduce the space needed for the system. Hot gas exchangers as standard make hot water production extra cost-effective.

Our main aim when developing Mega was to create a powerful control system. Monitoring and control can be performed directly on the heat pump's newly designed colour touchscreen, as well as via a web interface, an upstream control system or via mobile.



A+++ energy class when the heat pump is part of an integrated system
A+++ energy class when the heat pump is the sole heat generator
Energy class according to Eco-design Directive 811/2013



Mega^L and Mega^{XL}




Technical data Mega

Connections


- 1 Heat return (return line)
- 2 Heat supply (supply line)
- 3 Hot gas exchanger (supply line)
- 4 Hot gas exchanger (return line)
- 5 Coolant out (from heat pump)
- 6 Coolant in (to heat pump)
- 7 Lead-ins for incoming supply
- 8 Lead-in for communication cables and sensor

↑ = Flow direction

Mega^S and Mega^M

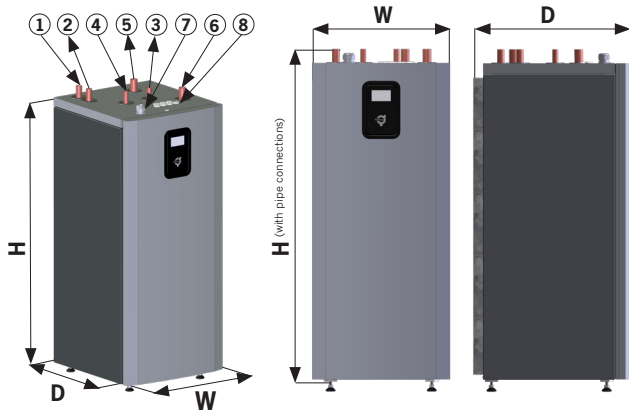

Mega^L and Mega^{XL}

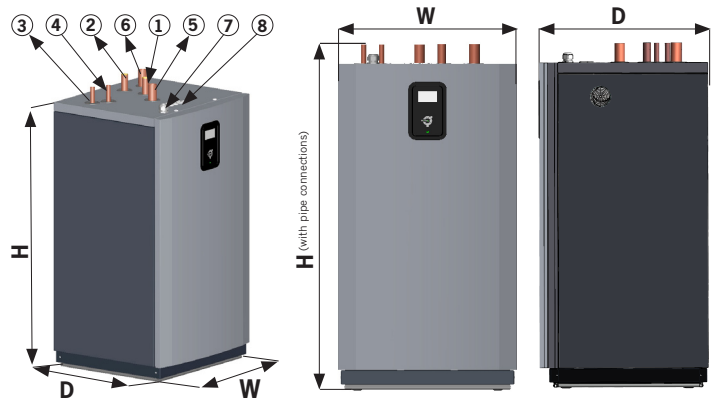

Mega		Mega ^S	Mega ^M	Mega ^L	Mega ^{XL}	
Refrigerant	Type	R410A	R410A	R410A	R410A	
	Amount ¹	kg	3,9	4,4	6,3	9,0
	Test pressure (low/high pressure)	MPa	3,0/4,5	3,0/4,5	3,0/4,5	3,0/4,5
	Design pressure	MPa	4,5	4,5	4,5	4,5
Compressor	Type	Scroll	Scroll	Scroll	Scroll	
	Oil	POE	POE	POE	POE	
Electrical data 3-N	Mains power supply	Volt	400	400	400	400
	Rated power, compressor	kW	14	17,5	22,2	32,5
	Rated power, circulation pumps	kW	0,7	0,7	1,0	1,0
	Fuse ¹⁹	A	32	40	50	63
Performance	COP ²		4,73	4,60	4,50	4,71
	Heat factor ²	kW	20,18	26,71	35,60	52,00
	Incoming power ²	kW	4,26	5,81	7,91	11,00
	SCOP, Floor heating (35°C)		5,72 ³	5,69 ⁵	5,29 ⁷	5,30 ⁹
	SCOP, Radiator (55°C)		4,33 ⁴	4,40 ⁶	4,20 ⁸	4,32 ¹⁰
	Power range (B0/W35)		10–33 ¹¹	11–44 ¹²	14–59 ¹²	21–88 ¹²
Energy class - system¹⁷	Floor heating (35°C)		A+++	A+++	A+++	N/A ²⁰
	Radiator (55°C)		A+++	A+++	A+++	N/A ²⁰
Energy class - product¹⁸	Floor heating (35°C)		A+++	A+++	A+++	N/A ²⁰
	Radiator (55°C)		A+++	A+++	A+++	N/A ²⁰
Max system pressure	Cooling circuit	bar	6	6	6	6
	Heating circuit	bar	6	6	6	6
Max/min temperature¹³	Cooling circuit	°C	20/-10	20/-10	20/-10	20/-10
	Heating circuit	°C	65 ¹⁴ /20	65 ¹⁴ /20	65 ¹⁴ /20	65 ¹⁴ /20
Max/min refrigerant circuit	Low pressure	MPa	0,23	0,23	0,23	0,23
	High pressure	MPa	4,5	4,5	4,5	4,5
Sound power level	Min/max ^{15a}	dB(A)	41–56 ¹¹	41–56 ¹²	40–59 ¹²	45–63 ¹²
	Sound power level ^{15b}	dB(A)	47	50	43	50
Anti-freeze	Ethanol + water solution -17°C ± 2 ¹⁶					
Dimensions (WxDxH) (without pipe connections)	mm	692x796x1652 ± 10	692x796x1652 ± 10	900x849x1644 ± 10	900x849x1644 ± 10	
Dimensions (WxDxH) (with pipe connections)	mm	692x796x1722 ± 10	692x796x1722 ± 10	900x849x1744 ± 10	900x849x1744 ± 10	
Weight	kg	300	310	407	487	

1) The refrigerant circuit is hermetically sealed and subject to the F-gas directive. Global Warming Potential (GWP) for R410A according to EC 517/2014 is 2088, giving a CO₂ equivalent corresponding to: S: 8143 kg, M: 9187 kg, L: 13154 kg, XL: 18792 kg.
 2) B0/W35 according EN14511 including circulation pumps with 2700 rpm at S and 3600 rpm at M, L, XL.
 3) B0/W35, according EN14825, Cold Climate Pdesign 33 kW
 4) B0/W55, according EN14825, Cold Climate Pdesign 31 kW
 5) B0/W35, according EN14825, Cold Climate Pdesign 36 kW
 6) B0/W55, according EN14825, Cold Climate Pdesign 34 kW

7) B0/W35, according EN14825, Cold Climate Pdesign 60 kW
 8) B0/W55, according EN14825, Cold climate Pdesign 55 kW
 9) B0/W35, according EN14825, Cold Climate Pdesign 85 kW
 10) B0/W55, according EN14825, Cold Climate Pdesign 79 kW
 11) Compressor speed 1500-4500 rpm
 12) Compressor speed 1500-6000 rpm
 13) Please note that it is not possible to combine all brine temperatures with heat transfer fluid temperatures.
 14) Minimum incoming brine temperature 0° C.
 15a) Sound power level measured according to EN 12102: 2017 and EN 3741: 2010 (B0/W35)

15b) Sound power level according to energy labelling, measured according to EN 12102:2017 and EN 3741:2010 (B0/W55)
 16) Always check local rules and regulations before using antifreeze.
 17) When the heat pump is part of an integrated system. According to Eco-design Directive 811/2013
 18) When the heat pump is the sole heat generator and the built-in controller is not included. According to Eco-design Directive 811/2013.
 19) The fuse size can be adjusted according to the heat pumps power output. Read more in technical literature 'Technical description - Mega', chapter 'Estimated current for XL, L and M, S'.
 20) Space heaters with a power capacity in excess of 70 kW are not covered by the energy labelling regulation (European Commission Regulation N° 811/2013)

